



ARJE KOMPLEMENTLYFT 1400



PRODUKTBESKRIVNING


Arje komponentlyft 1400 används för demontering och montering av t ex växellådor, central- och bakväxlar samt motorer. Lyften har en tryckluftsdreven, fotmanövrerad pump för höjning och sänkning.

Arje komponentlyft 1400 kan även utrustas med fixtur för demontering och montering av enkel- och tvillingmonterade hjul. Med tiltadapter fixturer tillas 8° i längd och sida.

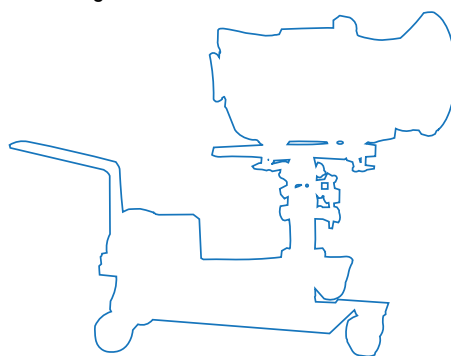

TEKNISKA FAKTA

Maxlast 1400 kg
Min höjd 800 mm (inkl tiltadapter och fixtur)
Max höjd 1650 mm (inkl tiltadapter och fixtur)
Vikt 280 kg




ARJE COMPONENT JACK 1400



PRODUCT DESCRIPTION

Arje component 1400 is used for remounting and mounting of e.g. gearboxes, axle gears and engines. The jack has a pneumatically driven food manoeuvre pump for vertical adjustments. It is easy to set up and move around. Arje component 1400 can be equipped with fixture for demounting and mounting of single and twin mounted wheels. With tilting adapter the fixtures can be tilted 8° lengthwise and sidewise.

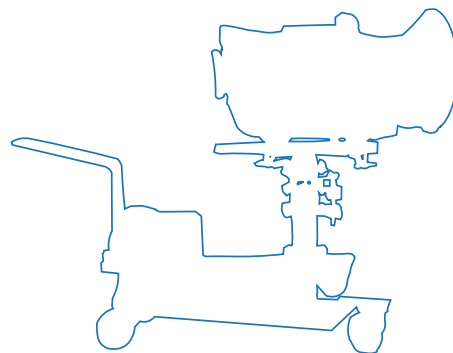

TECHNICAL FACTS

Max load 1400 kg
Min height 800 mm (tilting adapter and fixture included)
Max height 1650 mm (tilting adapter and fixture included)
Weight 2805 kg

